

Flexible LED Warning Lighthouse



**Bendable for mounting
on flat or curved surfaces**

USER GUIDE

Product Description


The silicone bendable LED lighthouse has effective resistance to impact and corrosion. It can be mounted on flat or curved surfaces up to the minimum diameter 150mm with 3M VHB tape. Better resistance to yellowing and uv.

Technical Specifications

Max Power	10W
Voltage	DC 10-30V
Flash Pattern	Single 20/ Dual 12
IP Rating	IP67
Operating Temperature	-30°C to +70 °C
Dimensions	100 x 23 x 10mm(Bezel-Free)
Certifications	ECE R65 Class1,R10,SAE J595


Product introduction

Dimensions




Mounting


A - Two Screws Mount With Bezel




B - 3M VHB Tape Mounting



Warning!!!




Do not install on surfaces
less than 150mm in diameter




Wirings

Single Color

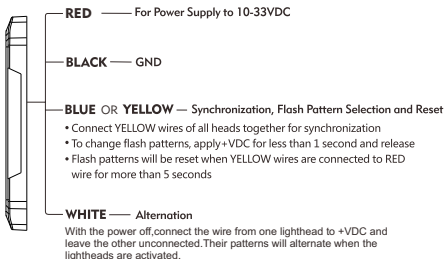


Dual Color

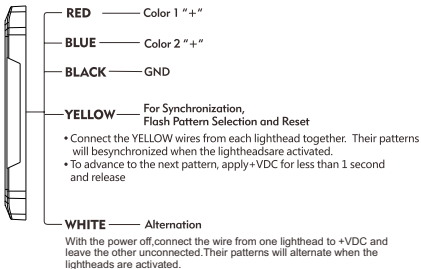


Products Wiring

Pattern Synchronization



Pattern Alternation



Flash Patterns

Single Color

1	Random (Default)	11	Single (Split)
2	R65 Single (All)	12	Double (Split)
3	Double (All)	13	Quad (Split)
4	Single (All)	14	Quint (Split)
5	Double (All)	15	Nonuplet (Split)
6	Quad (All)	16	Single - Quad (Split)
7	Quint (All)	17	Single - Nonuplet (Split)
8	Nonuplet(All)	18	Steady 2 (California)
9	Single - Quad (All)	19	Steady 2
10	Single - Nonuplet(All)	20	Steady(All)

Dual Color

1	Single R65
2	Double 2HZ
3	Triple 2HZ
4	Quad 2HZ
5	Cycle 1 to 4
6	Single Slow
7	Double Slow
8	Quad Slow
9	Lite Speed
10	Single to Quad
11	Warp
12	Steady on Color 1
	Steady on Color 2